


A Taylor-Made Easel


www.BlueEaglePress.com

{Parts list and steps on reverse}

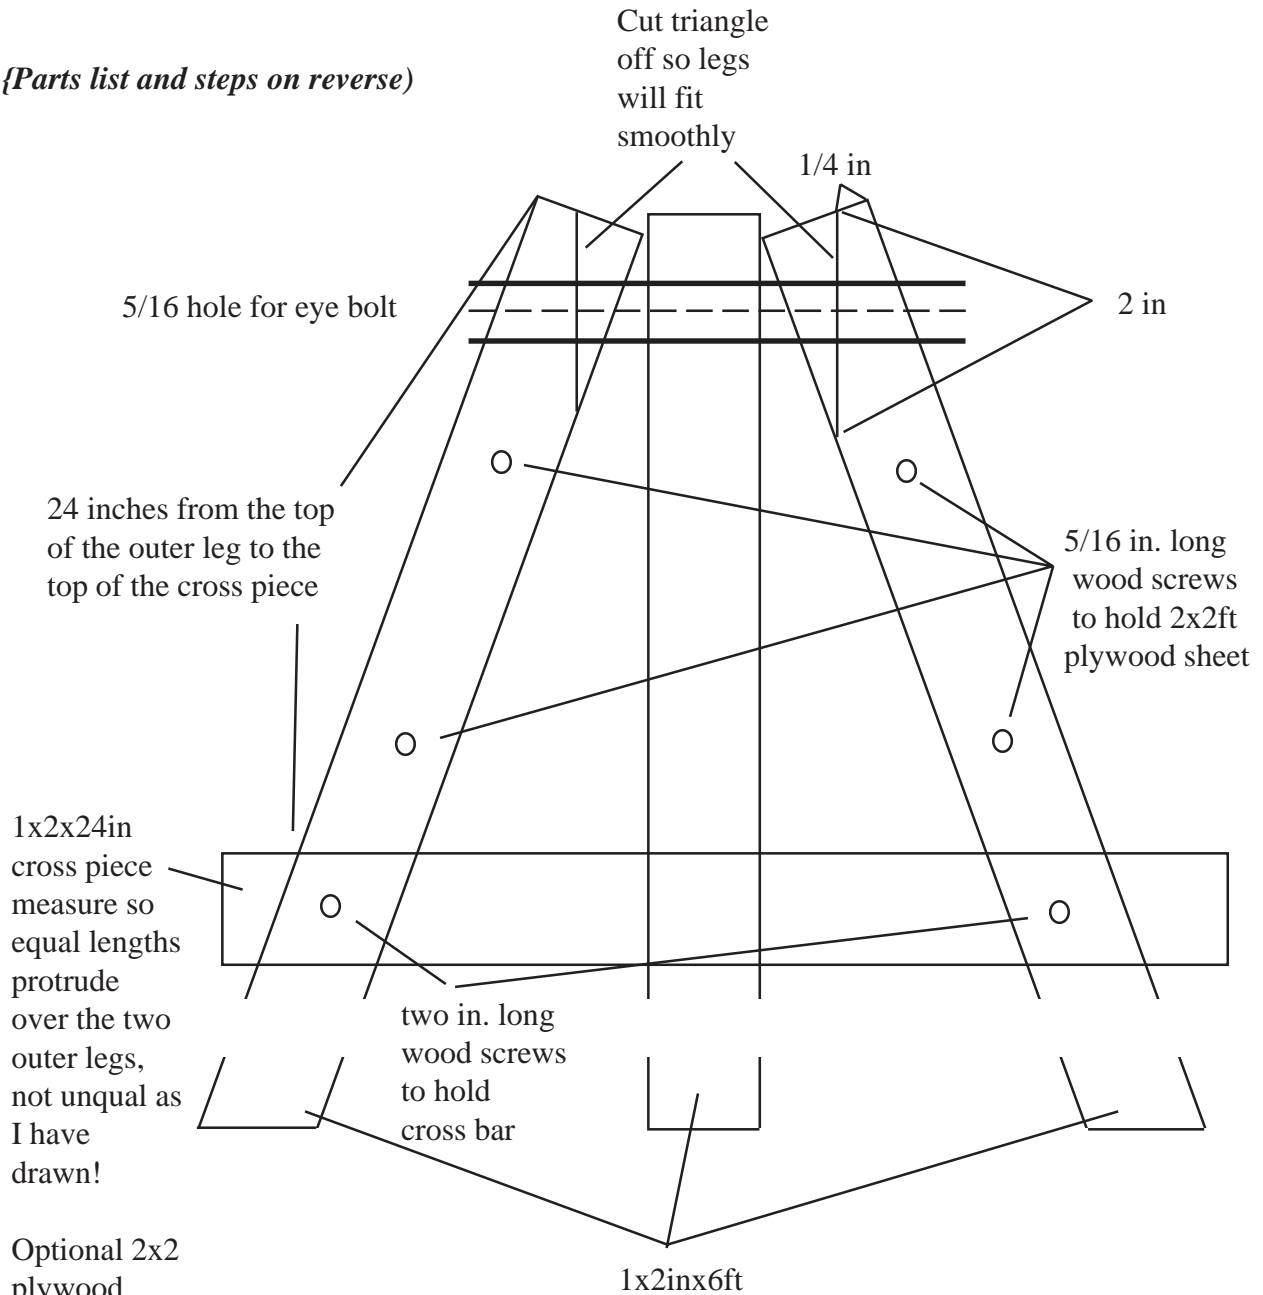

Optional 2x2 plywood should sit on top of cross-piece and go slightly above the top of the legs.

The center leg must be cut at an angle so when it is spread open like a tripod it does not hit the plywood sheet.

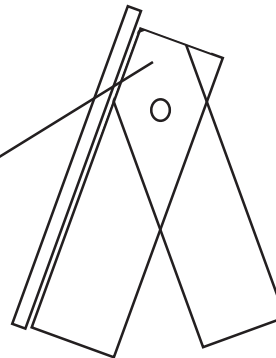

THE HOME DEPOT 0245		
16121 N DALE MABRY HWY		
TAMPA FL 33618		(813)960-0051
0245 00017 26389		10/09/02
SALE	11 371	11:04 AM
		
076105206357	5/16X4SSEB	1.59
030699322619	PLASTBAGGD	0.83
095043551268	1X2X6 C PO	2.75
095043551268	1X2X6 C PO	2.75
095043551268	1X2X6 C PO	2.75
081999130398	2X2 1/2 BC	2.98
046500016011	YARD GUARD	5.99
030699901135	NUTS/BOLTS	0.17
ITEM CORRECTION		
030699901135	NUTS/BOLTS	-0.17
030699901029	NUTS/BOLTS	0.05
030699901029	NUTS/BOLTS	0.05
19.74	SUBTOTAL	19.74
	TAX FL 7.000	1.39
	TOTAL	\$21.13

eye bolt
wing nut
3 legs
plywood square
mosquito fogger - for the West Nile Mosquito - not required but recommended
washers

ADD:

one more 2x1x24 for cross piece;
sandpaper;
stain/polyurethane varnish;
or
spray enamel;
four each 5/16 in wood screws to hold plywood sheet to front legs;
two each 2 inch wood screws to attach cross piece to front legs;
two eye screws and string to hold legs.

STEPS:

Cut angle for two outer legs;
assemble three legs with eye bolts and washers;
arrange cross piece and plywood sheet to approximate location, mark bottom of cross piece;
measure from top of both legs to ensure crosspiece ends up level;
drill all screw holes and loosely assemble to check;
mark level lines on the bottom of all three feet and amount to trim from middle leg top;
disassemble and sand all parts;
paint and let dry;
attach eye screws and string to keep legs from flopping;
Reassemble.

Add a 24 in. length of 1x2 in. held in place with two machine bolts with wing nuts across the top of the plywood sheet to hold presentation paper (I use 11x17 sheets printed on my ink jet)